

## ADVANCED DATA CAPTURE

### Enhance Customer Service with Faster Checkouts

Moving customers through checkout quickly is one of the most important issues faced by retailers today. The LS7708 mini-slot scanner from Symbol is the perfect choice for retailers looking for higher throughput and increased productivity.

The on-counter LS7708 is available for presentation or swipe scanning in an attractive form factor. For fast, accurate merchandise scanning at checkout, this easy-to-use, hands-free scanner requires minimal operator effort. Every feature contributes to increased performance for more efficient, rapid customer checkouts.

### Superior Design and Flexibility

The LS7708's easy-to-use design enables employees to spend more time with customers. It has a large scan window for easy and intuitive scanning. An omni-directional, rastering scan pattern with moving laser scan lines delivers superior first-pass read rates and better performance on truncated symbols.

For retailers with occasional bulky or heavy items, the LS7708 features a secondary scanner port to connect a handheld scanner. This removes the need for customers or associates to pick up and place cumbersome items on the counter, which saves valuable time. The LS7708 combines the benefits of productive, hands-free scanning with the versatility of a handheld scanner.

### High Performance at an Affordable Price

For medium- to high-volume retailers such as drug, grocery, specialty soft goods, hard goods and department stores, the LS7708 offers a cost-effective, hands-free solution. The LS7708 is designed for maximum uptime to withstand the toughest and busiest retail environments. An integrated EAS antenna in every scanner provides the interface for electronic article surveillance (EAS) de-activation, which makes the LS7708 one of the best values on the market today.

### Lower Total Cost of Ownership (TCO)

For a lower TCO, the LS7708 scanner has the identical solid reliability of the successful LS5700 plus added performance capabilities. LS7708 scanners read Reduced Space Symbology® (RSS), which offers tracking identification for produce and pharmaceuticals, to future proof your investment.

### Increase Associate and Checkout Productivity

First-pass data capture, less time spent orienting bar codes and secondary scanning capabilities all contribute to increased productivity. Improve worker and point-of-sale productivity in all these ways, and you can speed customers through checkout lines faster and more efficiently.

For more information, contact us at +1.800.722.6234 or +1.631.738.2400, or visit us on the web at [www.symbol.com/ls7708](http://www.symbol.com/ls7708).



#### FEATURES


#### BENEFITS

Rastering scan pattern	Speeds customers through checkout by maximizing first-pass read rates and reads truncated bar codes
RSS bar code decoding	Supports new, RSS bar codes to future proof your investment
Multi-interface capability	Protects your investment by allowing migration to future hosts with only a cable change
Universal cables	Saves money with one cable used across the Symbol product line
Scan stitching	Improves first-pass read rate and increases productivity
Electronic article surveillance (EAS)	Saves time by eliminating the need to de-activate security tag in a separate step
PC programming (123 Scan)	Allows for easy programming and set up of scanners – ideal for large installations
Secondary scanner port	Enables connectivity to secondary scanner for scanning heavy or oversized merchandise
Automatic sleep mode	Reduces power demand and increases life of the scanner

## Service Options

Symbol offers complete training, installation and ongoing support services to provide seamless deployment, management and continued support of all your advanced data capture solutions.

### LS7708 Decode Zone

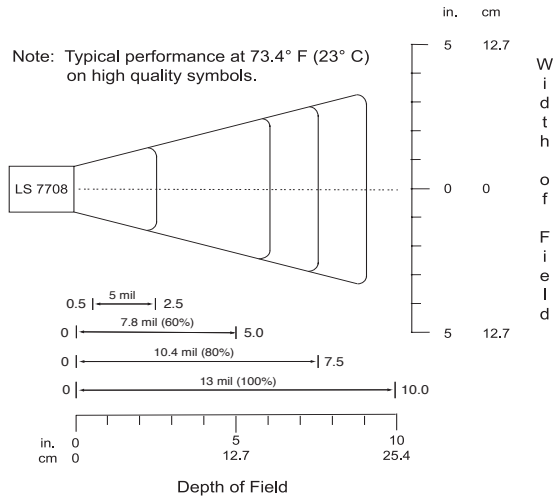

\*Minimum distance determined by symbol length and scan angle

EN410 CE



NOTICE: Repairs of this product may require the use of Symbol proprietary parts (and/or Symbol proprietary information). Symbol will sell these parts (and provide this proprietary information) only to end-user customers for self-service. It is Symbol's policy not to sell these parts to third-party service providers and not to allow a third-party service provider to act as an ordering or receiving agent for the parts necessary to repair this product. Applicable in the US. For all other countries, please contact your Symbol account manager or the local Symbol Customer Service representative in your area for further details.

## LS7708 Specification Highlights

### Physical Characteristics

Dimensions without stand:	
Height:	6.3 in (16 cm)
Width:	5.98 in (15.2 cm)
Depth:	3.73 in (9.5 cm)
Weight:	Scanner only: 2 lbs. (907 g)
Power Source:	Power drawn from Host terminal or external power supply; depends on Host type
Voltage:	5.5 VDC to 4.75 VDC measured at host terminal or external power supply
Typical/Max Current:	390mA/500mA
Power Source:	2 watts
Mounting Options:	Integral Mounting Bracket
Color:	Twilight Black

### Performance Characteristics

Light Source:	650nm visible laser diode
Print Contrast:	25% minimum reflective difference
Scan Patterns:	Static/Raster - Omnidirectional:24/120 scan lines
Scan Rate:	Static/Raster - Omnidirectional: 2400 scans/second
Typical Working Range:	5 mil: (38%) 0.5 in - 2.5 in (1.25 cm - 6.4 cm) 7.8 mil: (80%) 0 - 5.0 in (0 - 12.7 cm) 10.4 mil: (80%) 0 - 7.5 in (0 - 19.0 cm) 13 mil: (100%) 0 - 10.0 in (0 - 25.4 cm)

Depth of Field:	0-10 in/25 cm @ 13 mil (100% UPC/EAN)
Minimum Resolution:	5 mil
Decode Capability:	UPC/EAN/JAN, UPC/EAN with Supplementals, UCC/EAN 128, Code 128, ISBT 128, Code 39, Code 39 Trioptic, Interleaved 2 of 5, Discrete 2 of 5, Code 93, Code 11, Codabar, RSS Variants

Interfaces Supported:	USB, RS 232, IBM® 468X/9X, Keyboard Wedge, and Synapse™ (allows connectivity to virtually every POS host type), SPCI (for 123 Scan)
-----------------------	---

### User Environment

Operating Temperature:	32° to 104°F (0° to 40° C)
Storage Temperature:	-40° to 158°F (-40° to 70°C)
Humidity:	5% to 95% (non-condensing)
Ambient Light Immunity:	Immune to normal artificial indoor and natural outdoor (direct sunlight) lighting conditions. Fluorescent, Incandescent, Mercury Vapor and Sodium Vapor: 450 Ft Candles (4,844 Lux) Sunlight: 8000 Ft Candles (86,111 Lux)
EAS Support:	Electronic Article Surveillance Antenna (EAS) Included; Interlock feature for Sensormatic and Checkpoint

### Regulatory

Electrical Safety:	Certified to UL 1950, CSA C22.2 No. 950 EN60825
Laser Safety:	CDRH Class IIa Laser Product IEC 60825 Class 1 Laser Product
EMC:	CISPR B, FCC B

\*Refers to 100% UPC bar code (80% contrast) located 4 in./10 cm. from the scanner nose.

### Warranty

The LS7708 is warranted against defects in workmanship and materials for a period of 2 years (24 months) from date of shipment, provided that the product remains unmodified and is operated under normal and proper conditions. See full warranty for details.

## About Symbol Technologies

Symbol Technologies, Inc., The Enterprise Mobility Company™, is a recognized worldwide leader in enterprise mobility, delivering products and solutions that capture, move and manage information in real time to and from the point of business activity. Symbol enterprise mobility solutions integrate advanced data capture products, radio frequency identification technology, mobile computing platforms, wireless infrastructure, mobility software and world-class services programs under the Symbol Enterprise Mobility Services brand. Symbol enterprise mobility products and solutions are proven to increase workforce productivity, reduce operating costs, drive operational efficiencies and realize competitive advantages for the world's leading companies. More information is available at [www.symbol.com](http://www.symbol.com).

**symbol**  
The Enterprise Mobility Company™

Corporate Headquarters  
**Symbol Technologies, Inc.**  
One Symbol Plaza  
Holtsville, NY 11742-1300  
TEL: +1.800.722-6234  
+1.631.738.2400  
FAX: +1.631.738.5990

For Asia Pacific Area  
**Symbol Technologies Asia, Inc.**  
(Singapore Branch)  
Asia Pacific Division  
230 Victoria Street #05-07/09  
Bugis Junction Office Tower  
Singapore 188024  
TEL: +65.6796.9600  
FAX: +65.6337.6488

For Europe, Middle East and Africa  
**Symbol Technologies**  
EMEA Division  
Symbol Place, Winnersh Triangle  
Berkshire, England RG41 5TP  
TEL: +44.118.9457000  
FAX: +44.118.9457500  
MSP 07/04

For North America, Latin America and Canada  
**Symbol Technologies**  
The Americas  
One Symbol Plaza  
Holtsville, NY 11742-1300  
TEL: +1.800.722.6234  
+1.631.738.2400  
FAX: +1.631.738.5990

**Symbol Website**  
For a complete list of Symbol subsidiaries and business partners worldwide contact us at:  
[www.symbol.com](http://www.symbol.com)  
**E-mail**  
[info@symbol.com](mailto:info@symbol.com)



LS7708 02/05

Part No. LS7708 Printed in USA 02/05 © Copyright 2005 Symbol Technologies, Inc. All rights reserved. Symbol is an ISO 9001 and ISO 9002 UKAS, RVC, and RAB Registered company, as scope definitions apply. Specifications are subject to change without notice. All product and company names are trademarks, service marks or registered trademarks of their respective owners. For system, product or services availability and specific information within your country, please contact your local Symbol Technologies office or Business Partner.